


MONTAGEANLEITUNG

AKKU-RASENMÄHER/MULCHMÄHER

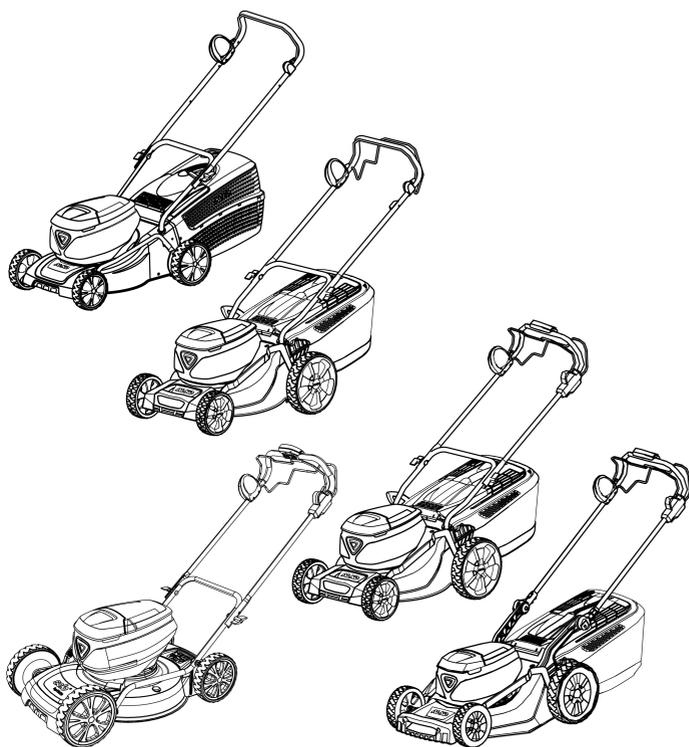

DE

GB

NL

FR

ES

PT

IT

SI

HR

RS

PL

CZ

SK

HU

DK

SE

NO

FI

EE

LT

LV

RO

BG

RU

UA

GR

MK






TR






42 cm


AL-KO

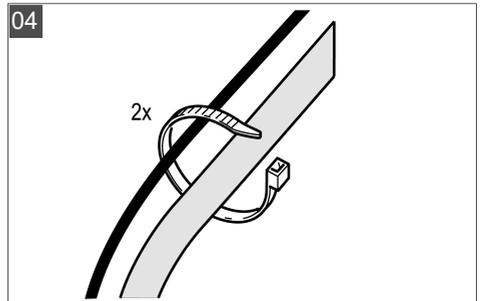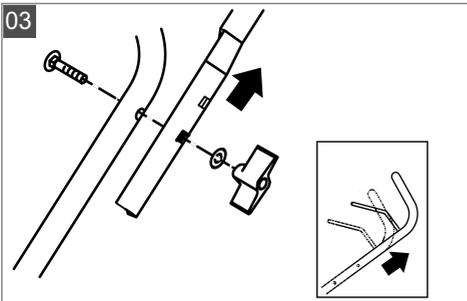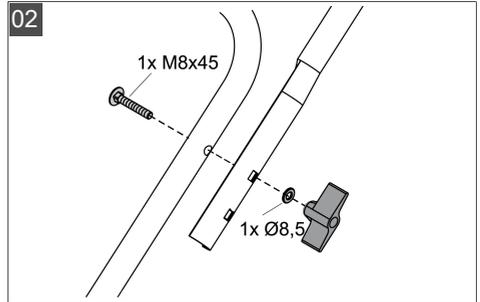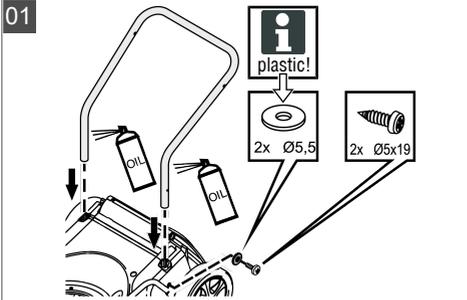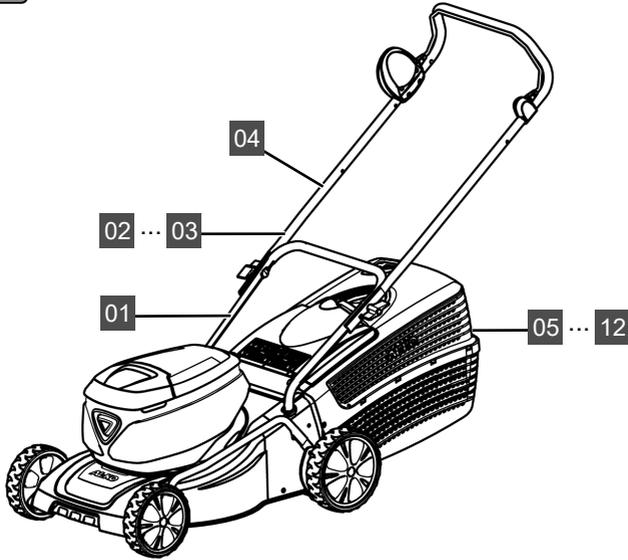


05

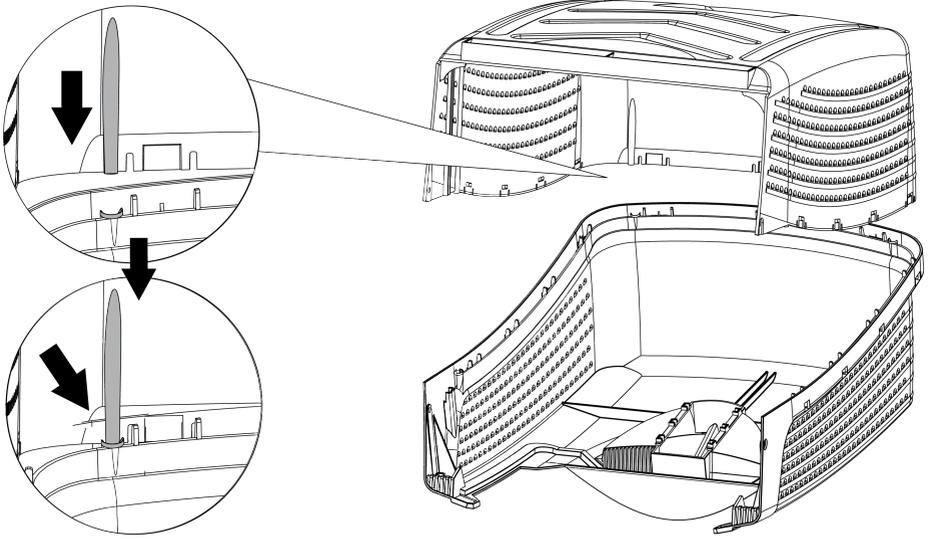


06




07




08

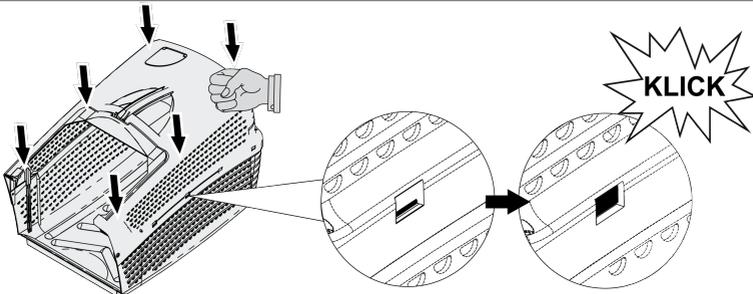


09

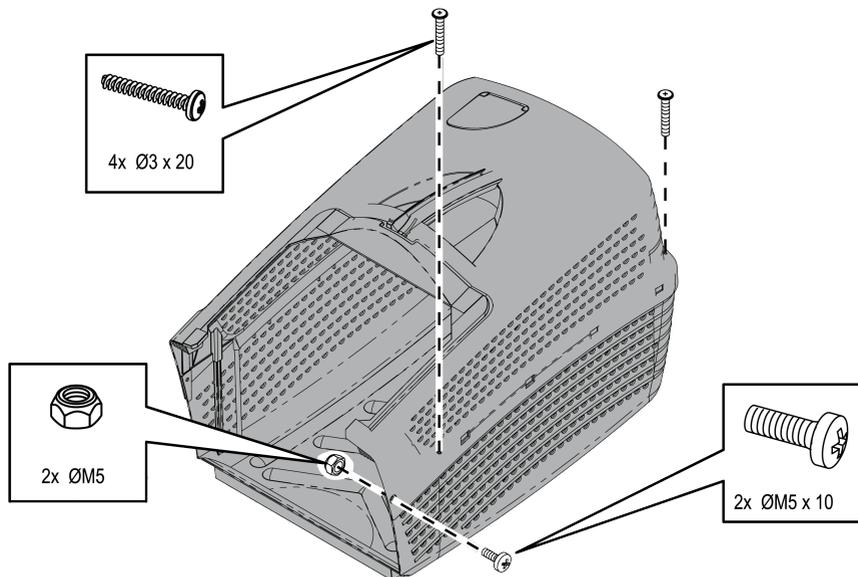


10



11

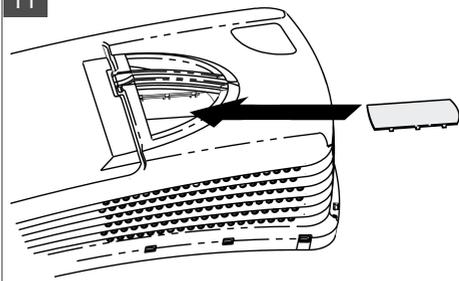






12





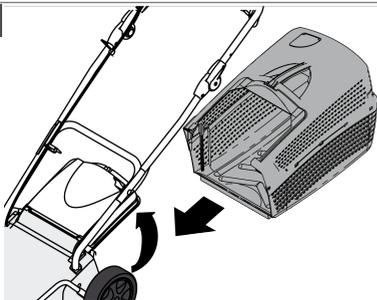










46 cm, 51 cm


AL-KO

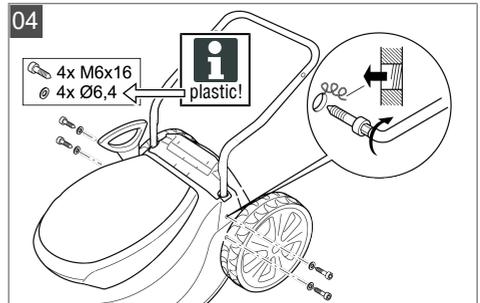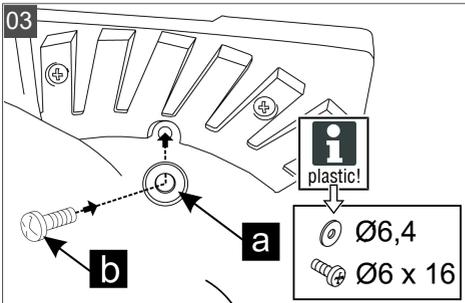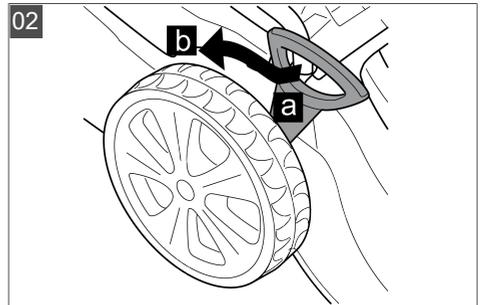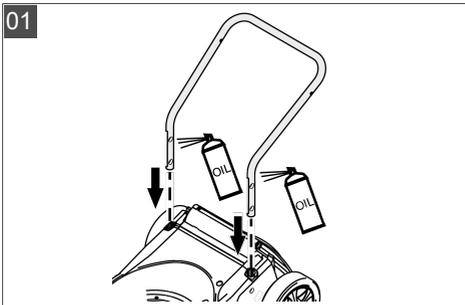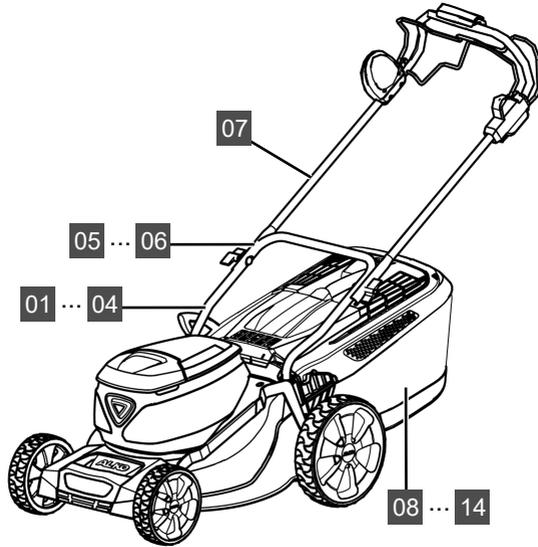

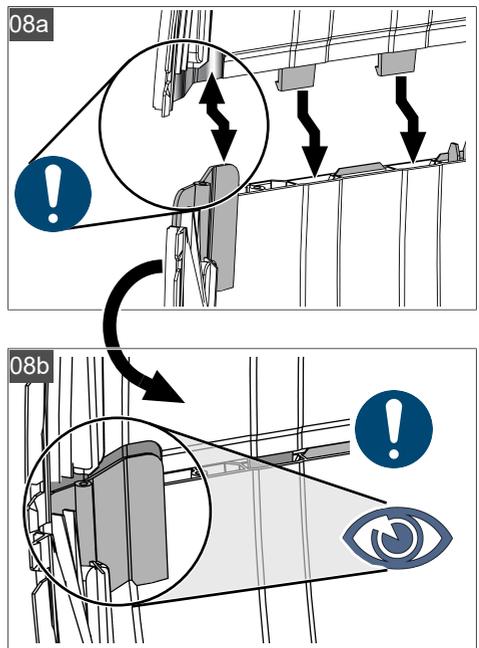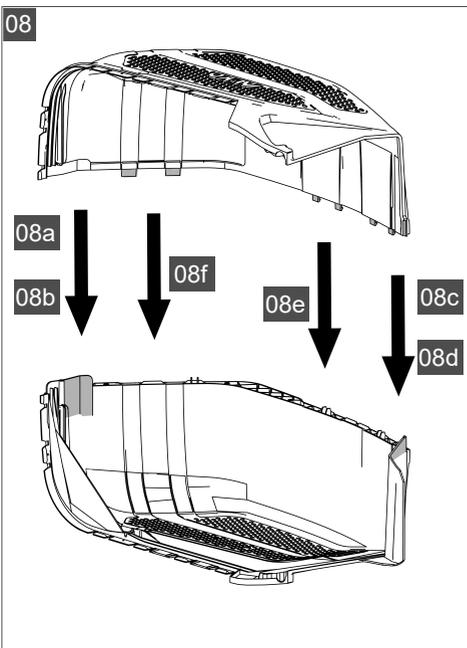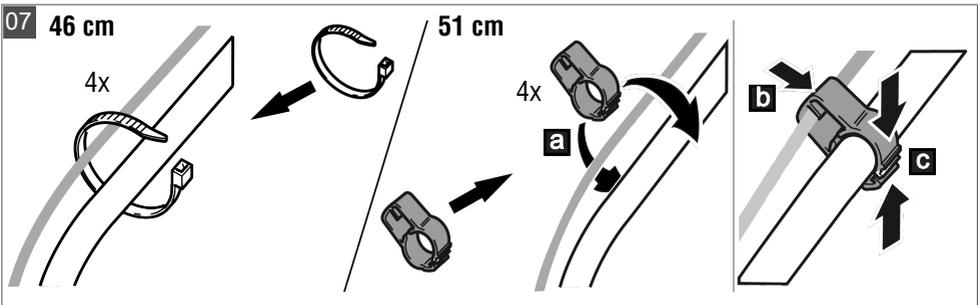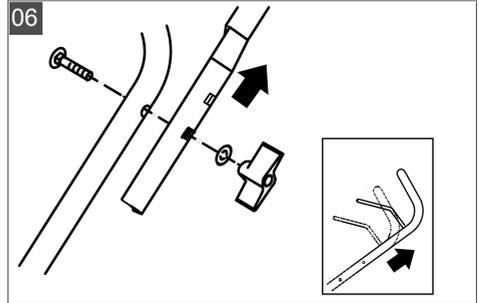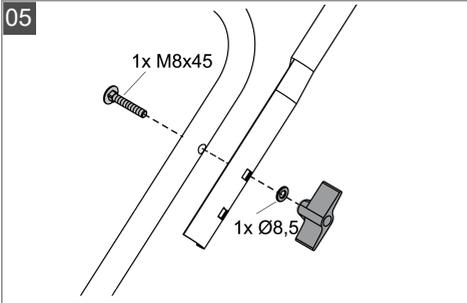


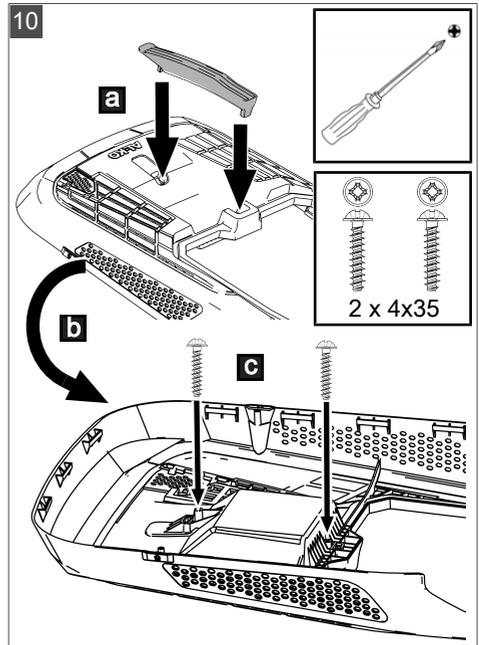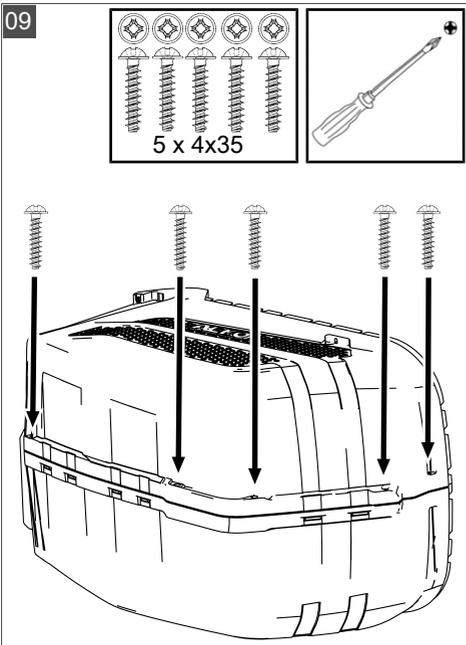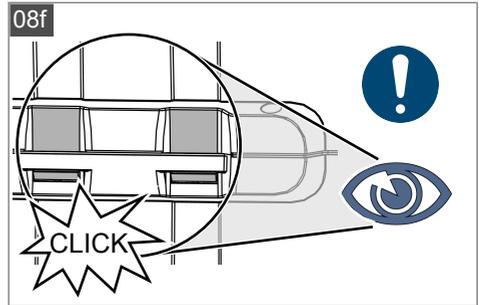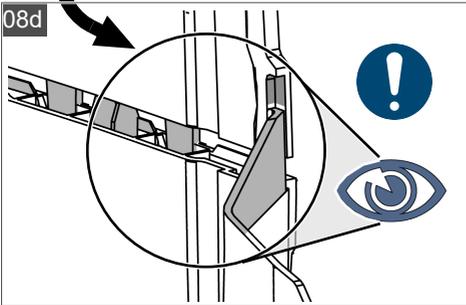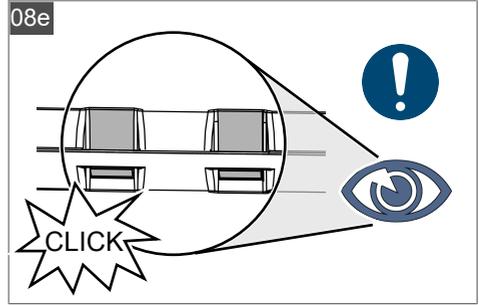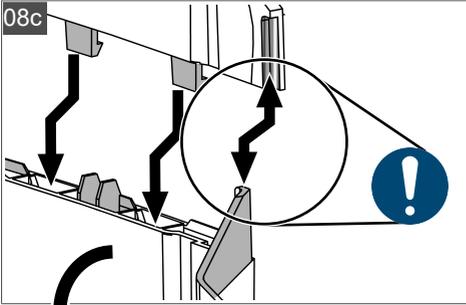


11

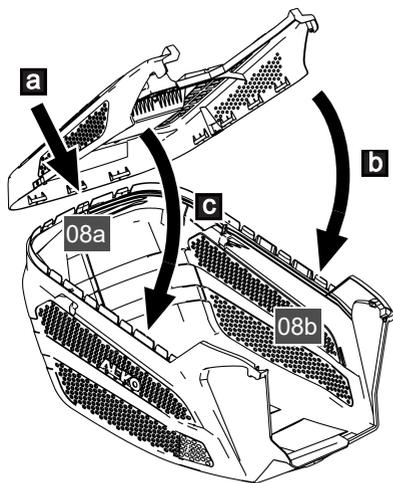



11a

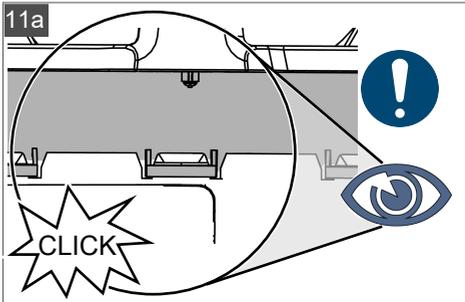


11b

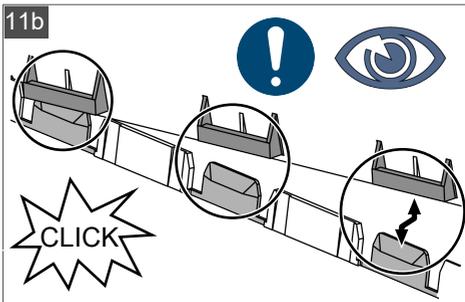


12

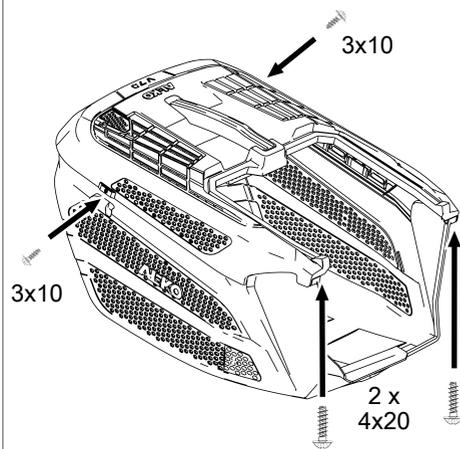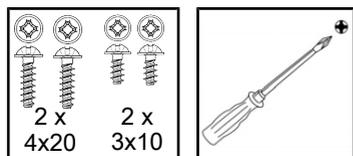

13

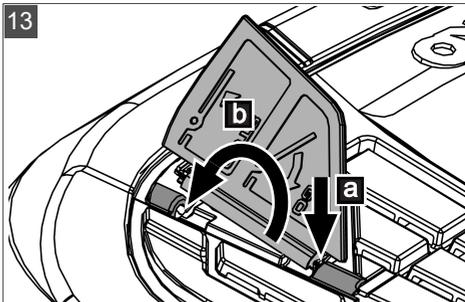







14





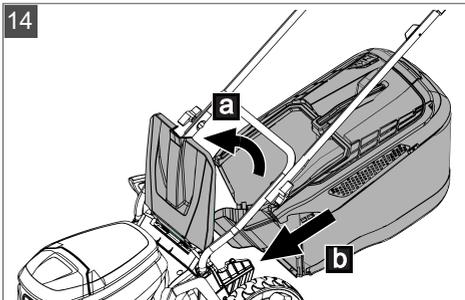




42 cm, 46 cm, 51 cm

solo[®]
by AL-KO

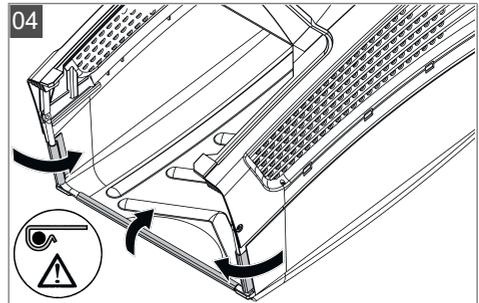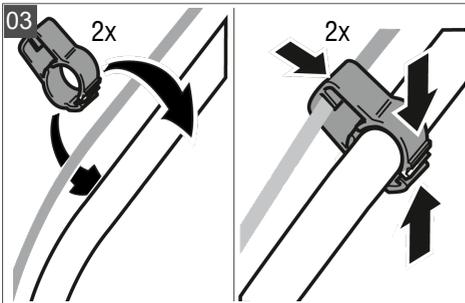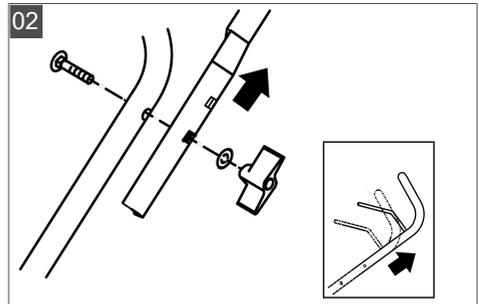
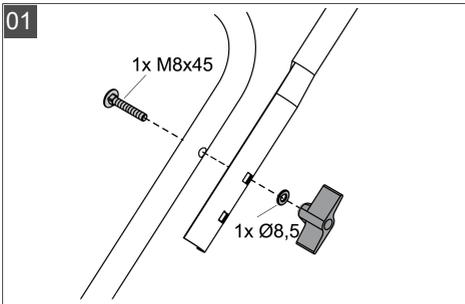
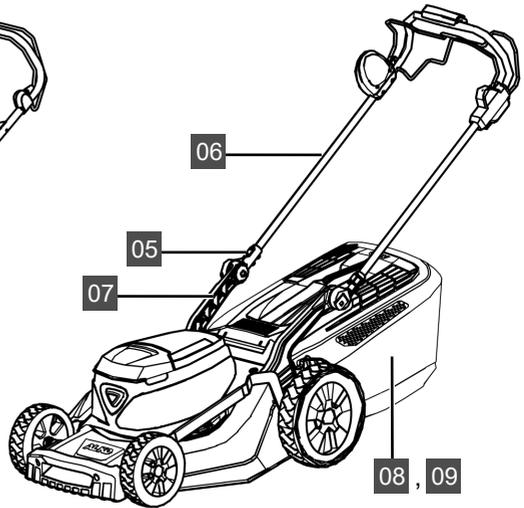
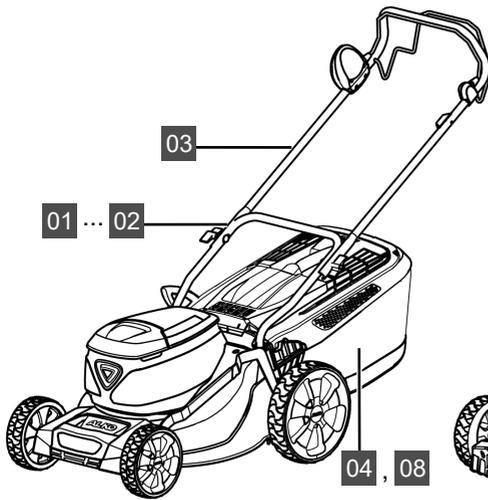


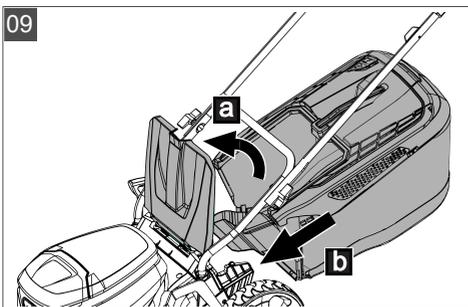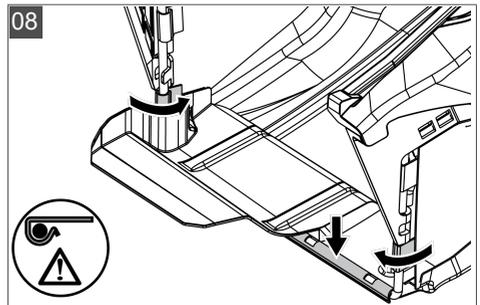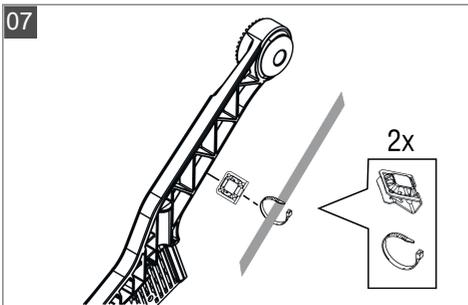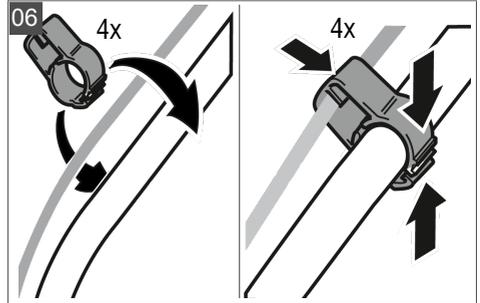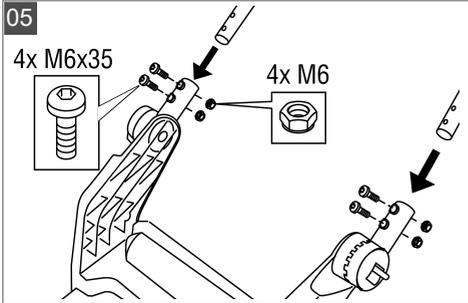



4736 Li VS

solo[®]
by AL-KO

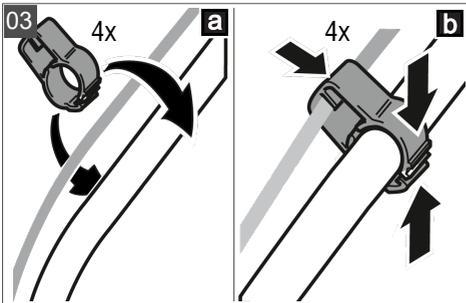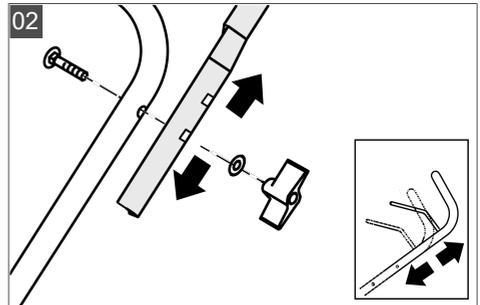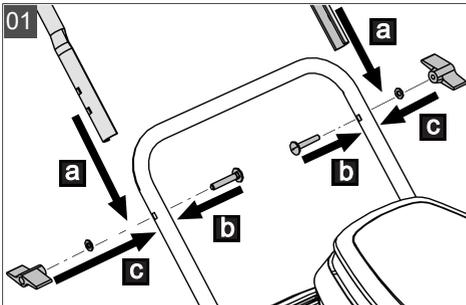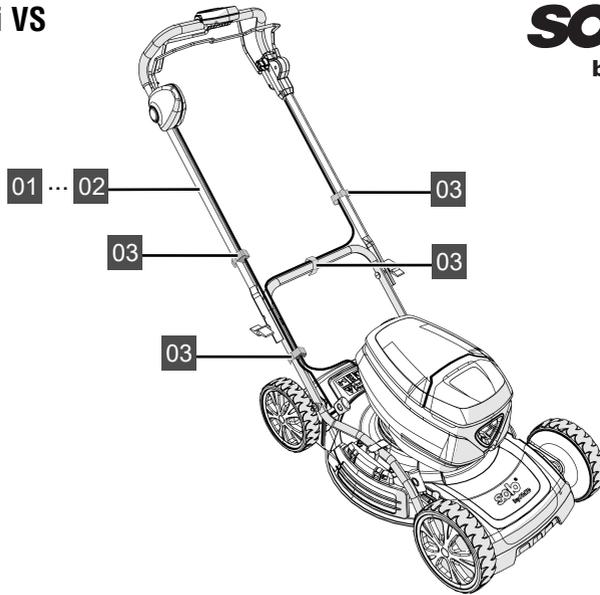



 Lawn mower	AL-KO 42.2 Li	AL-KO 46.2 Li SP	AL-KO 46.2 Li SP-W	AL-KO 51.2 Li VS-W	AL-KO 51.4 Li SP
 Working width	42 cm	46 cm	46 cm	51 cm	51 cm
 Order number	119977 123009	119978 123010	119979 123011	119980 123110	123086
 Rechargeable battery	1x 2x AL-KO 36V	1x 2x AL-KO 36V	1x 2x AL-KO 36V	1x 2x AL-KO 36V	1x - AL-KO 36V
 Charger	1x 1x	1x 1x	1x 1x	1x 1x	1x -
 Gross weight of machine without battery	24 kg	29,8 kg	29,8 kg	32 kg	30 kg
 Volume of grass box	65 l	70 l	70 l	70 l	70 l
 Cutting blade	113347	113348	113348	113979	113979
 Range of working heights	2,5 cm – 7,5 cm	3,0 cm – 8,0 cm	3,0 cm – 8,0 cm	3,0 cm – 8,0 cm	3,0 cm – 8,0 cm
 Stages of working height	7 stages (central)				
 Wheel drive	-	x (fix)	x (fix)	x (variable)	x (fix)
 Motor power	900 W	900 W	900 W	1200 W	1200 W



 Lawn mower	AL-KO 42.2 Li	AL-KO 46.2 Li SP	AL-KO 46.2 Li SP-W	AL-KO 51.2 Li VS-W	AL-KO 51.4 Li SP
 Motor speed	max. 2900 min ⁻¹				
 Mulching insert	-	X	X	X	X
 Side discharge unit	-	-	-	X	-
 Cockpit	-	-	-	X	-
 Smart button	-	-	X	X	-
 WLAN/WiFi	-	-	20 dBm 2400 MHz - 2483,5 MHz		-
 inTOUCH App	-	-	X	X	-
 Front handle	-	X	X	X	X
 Sound pressure level	L _{pA} = 68,9 dB(A) K = 1,9 dB(A)	L _{pA} = 69,1 dB(A) K = 1,9 dB(A)	L _{pA} = 69,1 dB(A) K = 1,9 dB(A)	L _{pA} = 74,2 dB(A) K = 2,2 dB(A)	L _{pA} = 74,2 dB(A) K = 2,2 dB(A)
 Sound power level	 L _{WA} = 88,9 dB(A), K = 1,9 dB(A)	 L _{WA} = 89,1 dB(A), K = 1,9 dB(A)	 L _{WA} = 89,1 dB(A), K = 1,9 dB(A)	 L _{WA} = 94,2 dB(A), K = 2,2 dB(A)	 L _{WA} = 94,2 dB(A), K = 2,2 dB(A)



 Lawn mower	AL-KO 42.2 Li	AL-KO 46.2 Li SP	AL-KO 46.2 Li SP-W	AL-KO 512 Li VS-W	AL-KO 514 Li SP
 Vibration value	$a_{hv} < 2,5 \text{ m/s}^2$ $K = 1,5 \text{ m/s}^2$	$a_{hv} < 2,5 \text{ m/s}^2$ $K = 1,5 \text{ m/s}^2$	$a_{hv} < 2,5 \text{ m/s}^2$ $K = 1,5 \text{ m/s}^2$	$a_{hv} < 2,5 \text{ m/s}^2$ $K = 1,5 \text{ m/s}^2$	$a_{hv} < 2,5 \text{ m/s}^2$ $K = 1,5 \text{ m/s}^2$
 Working temperature range	0 °C - +45 °C				
 Storage temperature range	-20 °C - +50 °C				
 Read instructions	<p>For charger and rechargeable batteries:</p>   Separate manuals.				

x: included, -: not included, *: see technical data chapter in the user manual.

 Lawn mower	solo by AL-KO 4232 Li P	solo by AL-KO 4232 Li SP	solo by AL-KO 4732 Li SP	solo by AL-KO 4735 Li VS	solo by AL-KO 4772 Li VS-W	solo by AL-KO 5272 Li VS-W	solo by AL-KO 4736 Li VS
 Working width	42 cm	42 cm	46 cm	46 cm	46 cm	51 cm	46 cm
 Order number	127597	127661	127598	127798	127599	127600	127723/ 127844
 Rechargeable battery	- (individual delivery)						
 Charger	- (individual delivery)						
 Gross weight of machine without battery	24,6 kg	27,7 kg	30,3 kg	30,3 kg	31,8 kg	34,3 kg	30,7 kg



 Lawn mower	solo by AL-KO 4232 Li P	solo by AL-KO 4232 Li SP	solo by AL-KO 4732 Li SP	solo by AL-KO 4735 Li VS	solo by AL-KO 4772 Li VS-W	solo by AL-KO 5272 Li VS-W	solo by AL-KO 4736 Li VS
 Volume of grass box	65 l	65 l	70 l	70 l	70 l	70 l	-
 Cutting blade	113347	113347	113348	113348	113348	113979	119224
 Range of working heights	2,5 cm – 7,5 cm	2,5 cm – 7,5 cm	3,0 cm – 8,0 cm	3,0 cm – 8,0 cm	3,0 cm – 8,0 cm	3,0 cm – 8,0 cm	3,0 cm – 8,5 cm
 Stages of working height	7 stages (central)						4 stages (front, rear)
 Wheel drive	-	x (fix)	x (fix)	x (variable)	x (variable)		x (variable)
 Motor power	900 W	900 W	900 W	900 W	900 W	1200 W	1200 W
 Motor speed	max. 2900 min ⁻¹	max. 2900 min ⁻¹	max. 2900 min ⁻¹	max. 2900 min ⁻¹	max. 2900 min ⁻¹	max. 2900 min ⁻¹	max. 2900 min ⁻¹
 Degree of protection	IPX1						
 Protection class	Protection class III (i.e. extra low voltage)						
 Mulching insert	-	-	x	x	x	x	-
 Side discharge unit	-	-	-	-	x	x	x

 Lawn mower	solo by AL-KO 4232 Li P	solo by AL-KO 4232 Li SP	solo by AL-KO 4732 Li SP	solo by AL-KO 4735 Li VS	solo by AL-KO 4772 Li VS-W	solo by AL-KO 5272 Li VS-W	solo by AL-KO 4736 Li VS
 Cockpit	-	-	-	X	X	X	X
 Smart button	-	-	-	-	X	X	-
 WLAN/WIFI	-	-	-	-	20 dBm 2400 MHz - 2483,5 MHz		-
 inTOUCH App	-	-	-	-	X	X	-
 Front handle	-	-	X	X	X	X	X
 Sound pressure level	$L_{pA} = 69,0 \text{ dB(A)}$ $K = 1,8 \text{ dB(A)}$	$L_{pA} = 68,4 \text{ dB(A)}$ $K = 1,8 \text{ dB(A)}$	$L_{pA} = 69,1 \text{ dB(A)}$ $K = 2,2 \text{ dB(A)}$	$L_{pA} = 80,0 \text{ dB(A)}$ $K = 1,0 \text{ dB(A)}$	$L_{pA} = 69,1 \text{ dB(A)}$ $K = 2,2 \text{ dB(A)}$	$L_{pA} = 73,5 \text{ dB(A)}$ $K = 2,1 \text{ dB(A)}$	$L_{pA} = 72,9 \text{ dB(A)}$ $K = 1,9 \text{ dB(A)}$
 Sound power level	 $L_{WA} = 89,0 \text{ dB(A)}$ $K = 1,8 \text{ dB(A)}$	 $L_{WA} = 88,4 \text{ dB(A)}$ $K = 1,8 \text{ dB(A)}$	 $L_{WA} = 89,1 \text{ dB(A)}$ $K = 2,2 \text{ dB(A)}$	 $L_{WA} = 91,0 \text{ dB(A)}$ $K = 1,0 \text{ dB(A)}$	 $L_{WA} = 89,1 \text{ dB(A)}$ $K = 2,2 \text{ dB(A)}$	 $L_{WA} = 93,5 \text{ dB(A)}$ $K = 2,1 \text{ dB(A)}$	 $L_{WA} = 92,9 \text{ dB(A)}$ $K = 1,9 \text{ dB(A)}$
 Vibration value	* $a_{HV} < 2,5 \text{ m/s}^2$ $K = 1,5 \text{ m/s}^2$	$a_{HV} < 2,5 \text{ m/s}^2$ $K = 1,5 \text{ m/s}^2$	$a_{HV} < 2,5 \text{ m/s}^2$ $K = 1,5 \text{ m/s}^2$	$a_{HV} < 2,5 \text{ m/s}^2$ $K = 1,5 \text{ m/s}^2$	$a_{HV} < 2,5 \text{ m/s}^2$ $K = 1,5 \text{ m/s}^2$	$a_{HV} < 2,5 \text{ m/s}^2$ $K = 1,5 \text{ m/s}^2$	$a_{HV} < 3,0 \text{ m/s}^2$ $K = 1,5 \text{ m/s}^2$
 Working temperature range	0 °C - +45 °C						
 Storage temperature range	-20 °C - +50 °C						



 Lawn mower	solo by AL-KO 4232 Li P	solo by AL-KO 4232 Li SP	solo by AL-KO 4732 Li SP	solo by AL-KO 4735 Li VS	solo by AL-KO 4772 Li VS-W	solo by AL-KO 5272 Li VS-W	solo by AL-KO 4736 Li VS
 Read instructions	For charger and rechargeable batteries:   Separate manuals.						

*x: included, -: not included, *: see technical data chapter in the user manual.*